

Панельная антенна PheeNet ANT24-015PN-D



2.3~2.7GHz


15dBi

Panel Directional


2xN type connectors(female)

PheeNet ANT24-015PN-D - панельная (Panel) антенна с двойной поляризацией и высоким коэффициентом усиления 15dBi. Антенна ANT24-015PN-D совместима со всеми точками доступа 2T2R MIMO, работающими в диапазоне частот 2.4GHz, имеет два N-type коннектора (female) и комплект для настенной установки. Направленные антенны применяются для соединения двух и более точек доступа или организации беспроводных мостов между двумя (PTP) или более (PTMP) узлами сети.


RADIATION PATTERN (PORT 1)

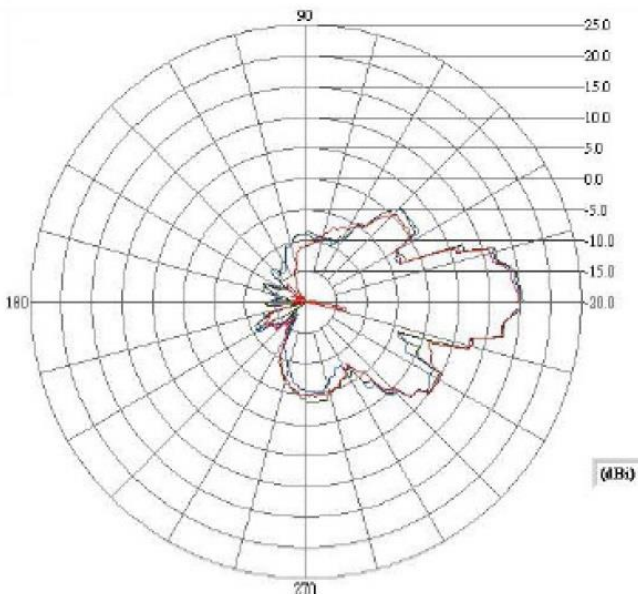


RADIATION PATTERN (PORT 2)

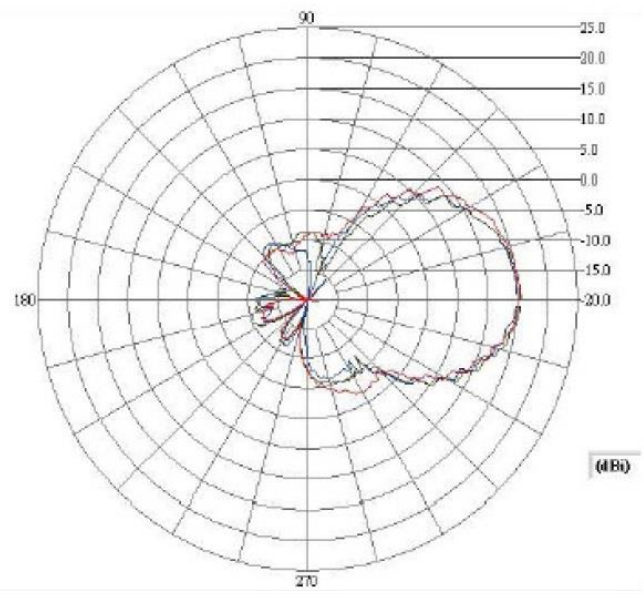


RETURN LOSS (port 1)

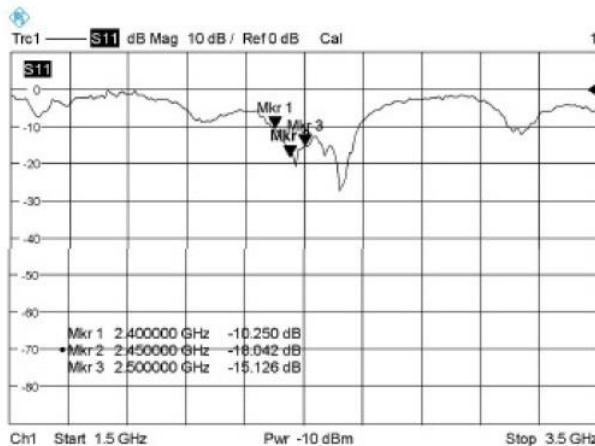

RETURN LOSS (port 2)

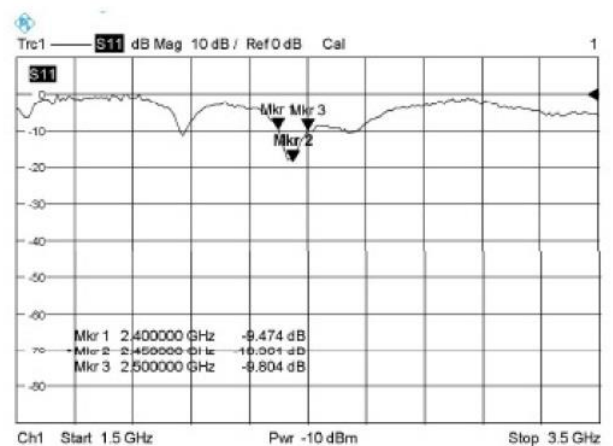

VSWR (port 1)

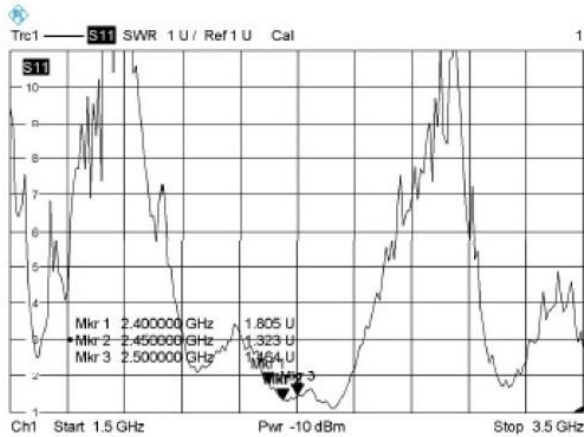

VSWR (port 2)



Технические характеристики PheeNet ANT24-015PN-D

Electrical Specification	
Frequency	2.4~2.5 GHz
Type	Panel Directional
Polarization	Dual polarization
Gain	15dBi
VSWR	≤ 2.0
Beam Width	Vertical Polarization:H-Plane 40.8° / E-Plane 21.5°
	Horizontal Polarization:H-Plane 21.5° / E-Plane 40.8°
Impedance	50Ω ± 5Ω
Connector Type	2 N Type (Female)
Environmental & Mechanical Characteristics	
Temperature	-30 to 60C
Material	Radome: ABS
Dimensions	330*295*35 mm
Weight	865g ± 20g